

# FILM & THEATRE

PERFORMANCE ROPES FOR RIGGING, STUNTS, ACCESS & LIFTING

PERFORMANCE  
*Since 1968*  
ROPES & CORDS



To order call +44 (0)1684 892222 or visit: [www.englishbraids.com](http://www.englishbraids.com)

# FILM & THEATRE

English Braids supply entertainment companies around the world due to the quality and service we offer. We provide rope for every application including lifting, rigging, crowd control and stunt lines.

**BASED IN MALVERN, UNITED KINGDOM, ENGLISH BRAIDS IS A GLOBAL MANUFACTURER OF PERFORMANCE ROPES, CORDS AND SLINGS.**

For over 50 years, our products have been used by many of the world's leading film and theatre companies where quality and safety are paramount. We are proud of our heritage for reliability, performance and innovation, and focus on using the highest quality yarns for continuous improvement – backed up with first class service and support. Able to withstand the most demanding of conditions, our products allow customers to push them to the limits of their design and ability. It is for these reasons that around the world so many choose English Braids as the brand they can rely on.



## BRAID-ON-BRAID CURTAIN TRACK

### 100% POLYESTER RANGE OF HIGH QUALITY ROPES

With superb durability, Braid-On-Braid continues to be the first choice. Pre-stretched, non-kinking and flexible in all conditions, this rope is easily spliced and works well with track hardware.



†Sustainable/Eco-Friendly options available.



### FEATURES & BENEFITS

- Double braid construction
- 12-strand core, 24-plait cover
- Easily spliced
- Superior wear resistance and longevity
- Ease of identification through colour range
- Perfectly balanced and easy to handle
- Heat set and pre-stretched

Reference	Diameter (mm)	Reel Length (m)	Weight (kg/100m)	Breaking Load (kg)	Breaking Load - Spliced (kg)	000/ White†	900/ Black	994/ Beige
1606	6	200	2.9	1,350	1030	16060200000	16060200900	16060200994
1608	8	200	5.1	2,000	1600	16080200000	16080200900	16080200994
1610	10	200	7.6	3,150	2520	16100200000	16100200900	16100200994
1612	12	100	11.7	4,300	3440	16120100000	16120100900	16120100994
1614	14	100	15.6	6,000	4820	16140100000	16140100900	16140100994
1616	16	100	19.5	7,250	5800	16160100000	16160100900	16160100994
1618	18	100	23.4	7,500	6000	16180100000	16180100900	16180100994
1620	20	100	34.0	11,000	8800	16200100000	16200100900	16200100994
1624	24	100	40.4	14,000	11200	16240100000	-	-

## S-RANGE HAULING LINE

### TRADITIONAL ROPE DEVELOPED WITH MODERN MANUFACTURING PROCESSES

The spun polyester increases grip while remaining soft.



### FEATURES & BENEFITS

- 24-plait cover with 12-strand core
- Spun polyester used on outer
- Heat set and pre-stretched
- Full colour range available
- Softer to the touch for hand use
- Higher levels of grip
- Easily identified through colours

Reference	Diameter (mm)	Reel Length (m)	Weight (kg/100m)	Breaking Load (kg)	000/ White	452/ Buff	960/ Red	900/ Black	910/ Blue
1406	6	100	2.8	600	14060100000	-	-	-	-
1408	8	100	5.0	1,120	14080100000	14080100452	14080100960	14080100900	14080100910
1410	10	100	7.2	1,980	14100100000	14100100452	14100100960	14100100900	14100100910
1412	12	100	10.4	2,300	14120100000	14120100452	14120100960	14120100900	14120100910
1414	14	100	12.4	3,500	14140100000	-	14140100960	14140100900	14140100910
1416	16	100	17.0	5,430	14160100000	-	14160100960	14160100900	14160100910

## SHOCK CORDS GENERAL PURPOSE

### SUPER STRETCH SHOCK CORDS

Made with the finest natural rubber filament cores. Our shock cords have a minimum of 100% stretch for greater durability.



### FEATURES & BENEFITS

- High quality multi-filament rubber core
- European quality Polypropylene coloured cover
- Very high extension levels
- Longevity delivered through quality materials
- Bright colour range for ease of identification
- Reliability and durability

Reference	Diameter (mm)	Reel Length (m)	Weight (/100m)	000/ White	960/ Red	910/ Blue	980/ Yellow	900/ Black
4903	3	100	0.7	49030100000	-	-	-	49030100900
4904	4	100	1.2	49040100000	49040100960	49040100910	49040100980	49040100900
4905	5	100	2.0	49050100000	49050100960	49050100910	49050100980	49050100900
4906	6	100	3.0	49060100000	49060100960	49060100910	49060100980	49060100900
4907	7	100	3.8	49070100000	-	-	-	-
4908	8	100	5.0	49080100000	-	49080100910	49080100980	49080100900
4910	10	100	8.2	49100100000	-	-	-	49100100900
4912	12	100	11.0	49120100000	-	-	-	49120100900

# TUTUS STATIC ROPE ACCESS

## THE FLAGSHIP PRODUCT WITHIN OUR TUTUS RANGE

The English Braids "Tutus static rope" is primarily aimed at delivering safety in line with BS EN1891. The rope has been fully tested with the mainstream hardware in the market.



### FEATURES & BENEFITS

- Developed in line with BS EN1891
- 32-plait nylon cover with nylon multi-cores
- Batch controlled process and traceability
- Colour range available
- Maximum strength from construction
- Colour range for easy identification

Reference	Diameter (mm)	Reel Length (m)	Weight (/100m)	Breaking Load (kN)	000/ White & blue fleck	900/ Black	960/ Red & blue fleck	910/ Blue & white fleck
3912	9.0	50	5.34	26.7	39120050000	39120050900	39120050960	39120050910
3912	9.0	100	5.34	26.7	39120100000	39120100900	39120100960	39120100910
3912	9.0	200	5.34	26.7	39120200000	39120200900	39120200960	39120200910
3913	10.5	50	6.79	30.6	39130050000	39130050900	39130050960	39130050910
3913	10.5	100	6.79	30.6	39130100000	39130100900	39130100960	39130100910
3913	10.5	200	6.79	30.6	39130200000	39130200900	39130200960	39130200910
3914	11.0	50	7.46	35.6	39140050000	39140050900	39140050960	39130050910
3914	11.0	100	7.46	35.6	39140100000	39140100900	39140100960	39130100910
3914	11.0	200	7.46	35.6	39140200000	39140200900	39140200960	39130200910
3915	12.0	50	9.03	45.0	39150050000	39150050900	39150050960	39150050910
3915	12.0	100	9.03	45.0	39150100000	39150100900	39150100960	39150100910
3915	12.0	200	9.03	45.0	39150200000	39150200900	39150200960	39150200910

PHYSICAL PROPERTIES AS TESTED TO EN 1891 : 1998				
Model designation	9mm Static Rope	10.5mm Static Rope	11mm Static Rope	12mm Static Rope
Type	B	A	A	A
Core material	Polyamide	Polyamide	Polyamide	Polyamide
Cover material	Polyamide	Polyamide	Polyamide	Polyamide
Mass of rope	53.4 grams	67.9 grams	74.6 grams	90.3 grams
Core %	54.9%	52%	55.6%	56.6%
Cover %	45.1%	48%	44.4%	43.4%
Sheath slippage	0	0	0	-3.5
Elongation 50kg - 150kg*	3.25%	3.00%	2.50%	2.00%
Static strength without terminations*	26.7kN	30.6kN	35.6kN	45kN
Static strength with figure 8*	15.4kN	18.8kN	19.4kN	24.9kN
Static strength with sewn eyes*	22.7kN	22.7kN	29.9kN	34.4kN
Impact force*	3.82kN	5.1kN	5.0kN	5.3kN
No. of drops to failure	>5	>5	>5	>5

# WINCHING DYNEEMA® CURTAIN TRACK / CAMERA RIGS

## WINCHING DYNEEMA® TAKES ITS STRENGTH FROM THE DYNEEMA® SK78 CORE

With exceptional break loads, Winching Dyneema offers a small diameter solution for a range of applications such as winching & hoisting and making it the perfect choice for rigging.



### FEATURES & BENEFITS

- Dyneema® SK78 core
- 100% colour coded polyester jacket
- Pre-stretched and heat set
- Max tenacity with minimal extension & creep
- Longevity and high performance
- Designed to splice easily

**\*MADE TO ORDER**

Reference	Diameter (mm)	Reel Length (m)	Weight (/100m)	Minimum Breaking Load - Spliced (kg)	000/ White	994/ Beige	900/ Black	960/ Red	910/ Blue	928/ Green
5408	8	200	4.3	3140	54080200000	54080200994	54080200900	54080200960	54080200910	54080200928
5410	10	200	5.7	4650	54100200000	54100200994	54100200900	54100200960	54100200910	54100200928
5412	12	200	8.3	5920	54120200000	54120200994	54120200900	54120200960	54120200910	54120200928
5414	14	200	10.8	8800	54140200000	54140200994	54140200900	54140200960	54140200910	54140200928
5416	16*	200	13.8	11600	54160200000	54160200994	54160200900	54160200960	54160200910	54160200928
5418	18*	100	19.8	14900	54180100000	54180100994	54180100900	54180100960	54180100910	54180100928
5418	18*	200	19.8	14900	54180200000	54180200994	54180200900	54180200960	54180200910	54180200928
5420	20*	100	25.8	16200	54200100000	54200100994	54200100900	54200100960	54200100910	54200100928
5420	20*	200	25.8	16200	54200200000	54200200994	54200200900	54200200960	54200200910	54200200928
5424	24*	100	53.0	23500	54240100000	54240100994	54240100900	54240100960	54240100910	54240100928
5424	24*	200	53.0	23500	54240200000	54240200994	54240200900	54240200960	54240200910	54240200928

## 3-STRAND POLYESTER HAULING LINE / BARRIER ROPE

TORQUE BALANCED, SOFT AND EASY TO HANDLE SUM UP THE PROPERTIES OF THE 3 STRAND POLYESTER.

A good all round rope that is used in many applications where balanced characteristics are required. The rope is designed to exceed British standards.

 **\*MADE TO ORDER**

### FEATURES & BENEFITS

- 100% polyester rope
- Heat set in production
- Torque balanced
- Hard wearing
- Good all round performance
- High tenacity

Reference	Diameter (mm)	Reel Length (m)	Weight (kg/100m)	Breaking Load (kg)	000/ White	912/ Navy	900/ Black	994/ *Beige
4606	6	200	3.2	1,300	46060200000	-	-	-
4608	8	200	4.6	1,700	46080200000	46080200912	46080200900	46080200994
4610	10	200	8.2	2,580	46100200000	46100200912	46100200900	46100200994
4612	12	100	11.6	3,350	46120100000	46120100912	46120100900	46120100994
4612	12	200	11.6	3,350	46120200000	46120200912	46120200900	46120200994
4614	14	100	15	4,100	46140100000	46140100912	46140100900	46140100994
4614	14	200	15	4,100	46140200000	46140200912	46140200900	46140200994
4616	16	100	19.3	5,400	46160100000	46160100912	46160100900	46160100994
4618	18	100	24	6,500	46180200000	46180200912	46180200900	46180200994
4620	20 (Coils)	100	30	7,300	46200100000	46200100912	46200100900	46200100994
4624	24 (Coils)	100	42.6	10,000	46240100000	46240100912	46240100900	46240100994
4628	28 (Coils)	100	63	14,640	46280100000	46280100912	46280100900	-
4632	32 (Coils)	100	82	18,840	46320100000	46320100912	46320100900	-

## 8-PLAIT MATT THROWLINE

HEAT PROCESSED FOR REDUCED STRETCH

The 8-plait construction is soft and kind on the hands with the matt finish giving superb grip and knotting ability.

### FEATURES & BENEFITS

- 8-plait spun polyester construction
- Full colours available
- Traditional look
- Hard wearing
- Easy to handle
- Easily identified

Reference	Diameter (mm)	Reel Length (m)	Weight (/100m)	Breaking Load (kg)	000/ White/Blue Fleck	910/ Blue	452/ Buff	960/ Red	900/ Black
1203	3	200	1.1	110	-	-	12030200452	-	-
1204	4	200	1.2	220	12040200000	12040200910	12040200452	12040200960	12040200900
1205	5	200	1.9	100	12050200000	12050200910	12050200452	12050200960	12050200900
1205	5	200	1.9	300	12050200000	12050200910	12050200452	12050200960	12050200900
1206	6	200	2.5	560	12060200000	12060200910	12060200452	12060200960	12060200900
1206	6	200	2.5	560	12060200000	12060200910	12060200452	12060200960	12060200900
1208	8	200	3.9	800	12080200000	12080200910	-	-	-
1210	10	200	6.1	980	12100200000	-	-	-	-

## DC12 CORD CAMERA RIGS

The English Braids DC12 cord delivers high performance with minimal weight and low extensions.

### FEATURES & BENEFITS

- 12-strand construction using Dyneema® SK75
- Potential steel replacement for dynamic loading
- Protected with a special impregnated coating
- Lower twist levels
- High strength for diameter
- Very low stretch

Reference	Diameter (mm)	Reel Length (m)	Weight (/100m)	Breaking Load (kg)	900/ Black	910/ Blue	960/ Red	980/ Yellow
5302	2	200	0.4	477	53020200900	-	-	53020200980
5303	3	200	0.5	918	53030200900	53030200910	53030200960	53030200980
5304	4	200	0.7	1620	53040200900	-	-	53040200980
5305	5	200	0.9	2340	53050200900	53050200910	-	53050200980
5306	6	200	1.4	2700	53060200900	-	-	-
5308	8	200	2.8	4500	53080200900	-	-	-

## 3-STRAND MATT HAULING LINE

### 3-STRAND ROPE WITH A TRADITIONAL FEEL

3-strand matt uses modern fibres to mimic the traditional materials however without some of the issues associated with rotting, UV degradation and longevity. This is a special polyester fibre laid to a 3-strand construction with the appearance of a quality hemp or jute.

#### FEATURES & BENEFITS

- Light weight and hard wearing
- Traditional look and feel
- Will float in water
- Alternative to natural fibres

Reference	Diameter (mm)	Reel Length (m)	Weight (/100m)	Breaking Load (kg)	994/ Buff	000/ White
4706	6	300	2.7	580	<a href="#">47060300994</a>	<a href="#">47060300000</a>
4708	8	300	5.1	1,320	<a href="#">47080300994</a>	<a href="#">47080300000</a>
4710	10	200	6.9	1,500	<a href="#">47100200994</a>	<a href="#">47100200000</a>
4712	12	200	10.6	2,550	<a href="#">47120200994</a>	<a href="#">47120200000</a>
4714	14	100	14.6	3,100	<a href="#">47140100994</a>	<a href="#">47140100000</a>
4716	16	100	16.4	3,800	<a href="#">47160100994</a>	<a href="#">47160100000</a>
4718	18	100	21.8	4,100	<a href="#">47180100994</a>	<a href="#">47180100000</a>
4720	20	100	25	4,600	<a href="#">47200100994</a>	<a href="#">47200100000</a>
4724	24	100	39	5,500	<a href="#">47240100994</a>	<a href="#">47240100000</a>

## NATURAL BLACK JUTE THROWLINE

### HEAT RESISTANT AND WILL TIE EASILY.

The rustic look and tactile fibre is hard wearing and heat resisting. Versatile and easy to tie, these strong 8-plait cords are very popular in theatre, TV & film applications.

#### FEATURES & BENEFITS

- Natural fibre
- Hard-wearing
- Heat resistant
- Easy to tie

Reference	Diameter (mm)	Reel Length (m)	Minimum Breaking Load - Spliced (kg)	900/ Black
490/05	5	100	115	<a href="#">49005100900</a>
490/05	5	300	175	<a href="#">49005300900</a>
490/06	6	100	175	<a href="#">49006100900</a>
490/06	6	300	175	<a href="#">49006300900</a>
490/07	7	100	190	<a href="#">49007100900</a>
490/07	7	300	190	<a href="#">49007300900</a>
490/08	8	100	230	<a href="#">49008100900</a>
490/08	8	300	230	<a href="#">49008300900</a>
490/10	10	100	230	<a href="#">49010100900</a>
490/10	10	300	330	<a href="#">49010300900</a>

## TECHNA-LINE STUNT LINE / CAMERA RIGS

### HIGH TEMPERATURE APPLICATIONS

Through the use of Technora® the chosen brand of Aramid® fibre, it has been possible to create a low weight high-tenacity steel replacement ideal for use in areas where heat is a consideration.

#### FEATURES & BENEFITS

- 12-strand Technora® line
- Pre-stretched and heat set
- Specialist coating for bespoke applications
- Ability to withstand high working temperatures
- Ultra low extension
- High strength for diameter
- Black for low visibility

Reference	Diameter (mm)	Reel Length (m)	Weight (kg/100m)	Minimum Breaking Load - Spliced (kg)	900/ Black
3762	3	200	0.68	782	<a href="#">37620200900</a>
3763	4	200	1.37	1560	<a href="#">37630200900</a>
3764	5	200	1.82	2080	<a href="#">37640200900</a>
3765	6	200	2.51	2870	<a href="#">37650200900</a>
3767	8	100	3.88	4430	<a href="#">37670100900</a>

## HEMTEX 3 HAULING LINE

### A 3-STRAND ROPE DESIGNED TO MIMIC THE LOOK OF NATURAL ROPES

Benefiting from being a floating line, it provides a cost effective alternative to the high quality polyester lines yet retaining the natural appearance.

#### FEATURES & BENEFITS

- Light weight and hard wearing
- Traditional look and feel
- Will float in water
- Alternative to natural fibres

Reference	Diameter (mm)	Reel Length (m)	Weight (/100m)	Breaking Load (kg)	994/ Natural
7806	6	110	1.5	400	<a href="#">78060110994</a>
7808	8	110	2.8	735	<a href="#">78080110994</a>
7810	10	110	4.5	764	<a href="#">78100110994</a>
7812	12	110	6.2	1220	<a href="#">78120110994</a>
7814	14	110	8.1	1900	<a href="#">78140110994</a>
7816	16	110	11.7	2400	<a href="#">78160110994</a>
7818	18	110	14	3040	<a href="#">78180110994</a>
7820	20	110	19.4	3400	<a href="#">78200110994</a>
7824	24	110	26.3	4600	<a href="#">78240110994</a>

# BARRIER ROPE BARRIER ROPE

## HOLD BACK THE CROWDS.

Soft braided 25mm diameter barrier ropes sold in solid colours. Cutting service available.

### FEATURES & BENEFITS

- Soft finish
- Colour range available
- High quality
- Compatible with 25mm fittings



Reference	Diameter (mm)	Reel Length (m)	Weight (kg/100m)	Minimum Breaking Load - Spliced (kg)	000/ White	900/ Black	910/ Blue	960/ Red
3700	25	50		1370	<a href="#">37000000000</a>	<a href="#">37000000900</a>	<a href="#">37000000910</a>	<a href="#">37000000960</a>

# WHIPPING TWINE

## ESSENTIAL IN THE FINISHING OF ROPE WORK.

Used by professionals worldwide the range of colours allows both colour coding and ease of identification where multiple lines are finished.



### FEATURES & BENEFITS

- Waxed finish
- Tamper resistant splicing
- Hard wearing and UV resistant
- High tenacity coloured polyester
- Available in both light and heavy construction
- Product aligned to individual requirements

Heavy Grade	Standard Grade	Standard Grade	Heavy Grade
25 metres per reel 10 reels per box - White	50 metres per reel 10 reels per box - White	50 metres per reel 10 reels per box Red, Black, Navy, Yellow and mixed	Buff waxed 40 metres per reel
<a href="#">3602901000</a> Ref. 3602	<a href="#">3601901000</a> Ref. 3601	<a href="#">3601901995</a> Ref. 3601	<a href="#">36040040000</a> Ref. 3604

# HAND-HELD HOT KNIFE CUTTER

Cuts by melting through the rope and sealing the core and cover together.



Complete unit [70420000000](#) Ref. 7030  
Replacement blade [70440000000](#) Ref. 7031

# LIFTING SLINGS ROPE SLINGS / ROUND SLINGS




As a Dyneema partner we can offer the strongest rope slings you can get, while our round slings are ideally suited to technical or precision lifting where tolerances are critical. We are able to offer slings in a variety of fibres including Dyneema DM20, SK78, SK75 and HMPE to suit every application and budget.

Contact our sales team for a bespoke quote on **+44 (0)1684 892222** or email [sales@englishbraids.com](mailto:sales@englishbraids.com)

# FIDS

Selma splicing fids are designed primarily for the splicing of kernmantle ropes. The standard set of fids allows splicing for ropes with a diameter of up to 20mm. The single fid allows for larger diameters and measures 20mm.

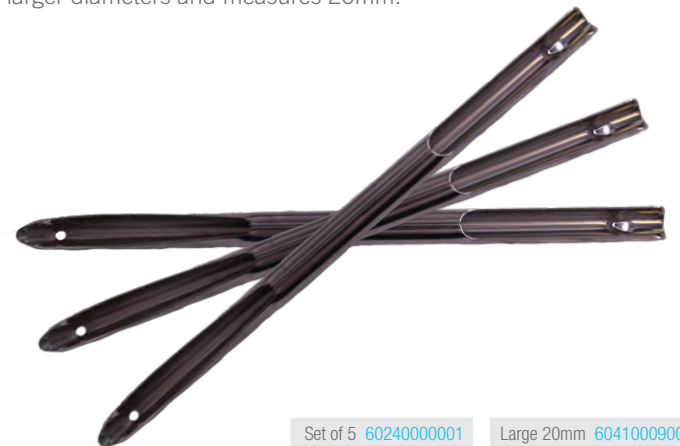

Set of 5 [60240000001](#) Ref. 6025  
Large 20mm [60410009000](#) Ref. 6035



Call +44 (0)1684 892222  
Email [sales@englishbraids.com](mailto:sales@englishbraids.com)

[www.englishbraids.com](http://www.englishbraids.com)

English Braids Ltd. Spring Lane, Malvern,  
Worcestershire WR14 1AL United Kingdom

